BRUHATH BANGALORE MAHANAGARA PALIKE

Ward 12, Shettyhalli

NAME OF WORK	**Improvements to road and drain at Surya enclave Abbigere in Ward No.12, Shettyhalli Sub Division.**

Estimated Cost	**50.00**	**Lakhs**

Sl.No.	Description of work	Measurments No.s	L	B	D	Qty	Unit	Rate	Amount
1	Earthwork excavation by manual means in Ordinary soil involving an average horizontal throw upto 2 meters and an average lift upto 0.5 m, excavated surface levelled and sides neatly dressed, the disposed earth to be levelled neatly after breaking of clods complete as per specifications with all leads and lifts etc., complete as per the direction of Engineer-in-charge of the work..(PWD SR 2016-17, Page No.142, Item No. 19.1) including Conveying the excavated earth silt, debris and over burden earth etc., to lead of 0 to 5 kms distance by using private vehicle this includes the cost of loading and unloading charges etc., complete as per the direction of Engineer-in-charge of the work								
	for Damaged portion of road								
		1	2	50.00	6.10	0.30	183.00			
		1	1	45.00	5.50	0.30	74.25			
		1	4	35.00	4.80	0.30	201.60			
					Total qty.		**458.85**	**cum**	**175.96**	**80739.00**
2	KSRRB 300-58. Compaction of original ground with maximum of 6 passes of 8 to 10 tonnes power roller including filling in depression occuring during rolling including cost of all labour, HOM of machinery complete as per specifications.Page No 149/ Item No. 19.64 PWD SR 2016-17								
		1	2	50.00	6.10		610.00			
		1	1	45.00	5.50		247.50			
		1	4	35.00	4.80		672.00			
					Total qty.		**1529.50**	**sqm**	**5.30**	**8106.00**
3	KSRRB M400-1 For Grading I material construction of granular sub-base by providing coarse graded crushed stone aggregates of Granite/ trap/basalt material spreading in uniform layers with motir grader on prepared surface mixing by a mix in place method with rotawater at OMC, and Compacting with vibratory roller to achieve the desired density, complete as per specifications.by mix in a Place method for course Graded Granular Sub Base Material as per 400-2 for grading I material . Page No 155/ Item No. 20.6.1 PWD SR 2016-17								
		1	2	50.00	6.10	0.15	91.50			
		1	1	45.00	5.50	0.15	37.12			

ತಾಂತ್ರಿಕ ಸಹಾಯಕರು
ಮುಖ್ಯ ಅಭಿಯಂತರವರ ಕಛೇರಿ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬಿ.ಬಿ.ಎಂ.ಪಿ.

		1	4	35.00	4.80	0.15	100.80			
						Total qty.	**229.42**	**cum**	**1518.98**	**348484.00**
4	Providing, laying, spreading and compacting stone aggregate to wet mix macadam specification including premixing the Material with water at OMC in mechanical mix plant carriage of mixed Material by tipper to site, laying in uniform layers with paver in sub-base / base course on well prepared surface and compacting with vibratory roller to achieve the desired density. Complete as per specifications. MORTH Specification No.406 [P.No.158- It.No20.18]									
		1	2	50.00	6.10	0.20	122.00			
		1	1	45.00	5.50	0.20	49.50			
		1	4	35.00	4.80	0.20	134.40			
						Total qty.	**305.90**	**cum**	**1768.08**	**540856.00**
5	Providing and applying primer coat with S.S bitumen emulsion on prepared surface of granular base such as WMM including cleaning of road surface and spraying primer at the rate of .60kg /sqm using mechanial means complete as per Specifications. (Pg.no.160, It.no.21.6)									
	On WMM									
		1	2	50.00	6.10		610.00			
		1	1	45.00	5.50		247.50			
		1	4	35.00	4.80		672.00			
						Total qty.	**1529.50**	**sqm**	**29.68**	**45396.00**
6	Providing and laying bituminous macadam on prepared surface with crushed coarse aggregates as per design mix formula for base / binding course including loading of aggregates with F.E. loader, hot mixing of stone aggregates and bitumen in hot mix plant 40 tonne capacity, transporting the mixed material in tipper to paver and laying mixed materials with paver finisher to the required level and grade, rolling by power roller to achieve the desired density, 50/75mm compacted thickness with 3.3% bitumen but excluding the cost of primer/tack coat with lead incl. cost of all materials, labour, HOM of machineries complete as per specifications with 80/100 grade bitumen using 40/60TPH capacity H.M.P with Mechanical paver Gr II (50/75mm) with 3.3% VG-30 Bitumen as per the directions of Engineer-in-charge of the work (PWDSR 2016-17, P.No.162, I No.21.11.6)									
		1	2	50.00	6.10	0.05	30.50			
		1	1	45.00	5.50	0.05	12.37			
		1	4	35.00	4.80	0.05	33.60			
						Total qty.	**76.47**	**cum**	**5669.94**	**433580.00**
7	KSRRB 500-7. Providing and applying tack coat on the prepared black topped surfaces at 2.5 kg per 10 sqm, heating bitumen in boiler fitted with spray set (excluding cleaning of road surface) including cost of all materials, labour, HOM of machineries complete as per specifications.(Pg No.160 It. No.21.7)									
	on BM									

ಶಾಂತ್ರಿಕ ಸಹಾಯಕರು
ಮುಖ್ಯ ಅಭಿಯಂತರವರ ಕಛೇರಿ
ದಾವಣಗೆರೆ ವಲಯ, ಪಿ.ಡಬ್ಲ್ಯು.ಡಿ.

	1	1	50.00	6.10		305.00			
	1	1	45.00	5.50		247.50			
	1	1	35.00	4.80		168.00			
On BC									
	1	3	175.00	6.00		3150.00			
from railway gate to Chikkabanavara road	1	1	600.00	7.50		4500.00			
	1	1	150.00	5.50		825.00			
	1	1	135.00	5.50		742.50			
vinsysks lsyout 1st crs	1	1	250.00	5.50		1375.00			
" 2nd crs	1	1	44.00	5.50		242.00			
				Total qty.		**9938.00**	**sqm**	**12.72**	**126411.00**
8	KSRRB 500-2. Cleaning the existing black topped surface with brooms, soft brushes and finally dusting with old gunny bags and / or compressed air to receive bituminous treatment including cost of all materials, labour, HOM of machineries complete as per specifications. (Pg.no.161, It.no.21.2)								
	1	3	175.00	6.00		3150.00			
from railway gate to Chikkabanavara road	1	1	600.00	7.50		4500.00			
	1	1	150.00	5.50		825.00			
	1	1	135.00	5.50		742.50			
	1	1	250.00	5.50		1375.00			
	1	1	44.00	5.50		242.00			
				Total qty.		**10834.50**	**sqm**	**3.18**	**34454.00**
9	KSRRB M500-19. Providing and laying bituminous concrete with hot mix plant using crushed aggregates of specified grading, pre mixed with bituminous binder and filler, transporting the hot mix to work site laying with paver finisher to the required grade, level and alignment . Rolling with smooth wheeled Vibratory and tandem rollers to achieve the desired compaction as per MORTH specification clause no 500.9 complete in all respects complete as per specifications. MORTH specification No509, using 100/120 TPH capacity H.M.P.with Mechanical paver Gr -II (30mm to 45mm) with 6% VG-Bitumen (P-165, It, 21.22.6)								
	1	3	175.00	6.00	0.03	94.50			
from railway gate to Chikkabanavara road	1	1	600.00	7.50	0.04	180.00			
	1	1	150.00	5.50	0.03	24.75			
	1	1	135.00	5.50	0.03	22.27			
	1	1	250.00	5.50	0.03	41.25			
	1	1	44.00	5.50	0.03	7.26			
				Total qty.		**370.03**	**cum**	**8013.60**	**2965272.00**

ಕಾರ್ಯಪಾಲಕ ಸಹಾಯಕರು
ಮುಖ್ಯ ಅಭಿಯಂತರರವರ ಕಛೇರಿ
ಬಾಸವಹಳ್ಳಿ ವಲಯ, ಬಿ.ಜಿ.ಎಂ.ಪಿ.

4539838.00

									Sub Total	4583298.00
10	KRIDL Charges @ 8% +1-/-								408585.00	366664.00
11	PMC & QC Charges 1%								45398.00	45833.00
12	Miscellaneous and unforeseen charges								6179.00	4205.00
										5000000.00
	(Rupees Fifty Lakhs Only)									

ERTIFICATE

1 *Certified that The work spot has been inspected by me and the work is necessary & site condition*
2 *Certified that the work is not split*
3 *Certified that the estimate is based on PW,P&IWTD Bangalore Circle SR of 2016-17*
4 *Certified that Adequate & necessary provisions have made in the estimate.*
5 *Certified that the above area comes under BBMP limit*
6 *This Work is not included in any other work taken up*

Ravi N.C.

sst Engineer
Ward-12

Assistant Executive Engineer
Shettyhalli Sub Division
B.B.M.P

Excecutive Engineer
Dasarahalli Division
B.B.M.P

ಸಂ. EE/DD/AS/17/17-18 ದಿನಾಂಕ: 21.7.17

ರೂ. Fifty lacky only (Rs. 50.00 lacky)

ಅಂದಾಜು ಪಟ್ಟಿಗೆ ಆಡಳಿತಾತ್ಮಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ

ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಬಿ.ಬಿ.ಎಂ.ಪಿ.ದಾಸರಹಳ್ಳಿ ವಿಭಾಗ
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು.

ಸಂ. CE/TS/ai/17-18 ದಿನಾಂಕ: 21/07/2017

ರೂ. Rs. 50.00 lacky /-

ಈ ಅಂದಾಜು ಪಟ್ಟಿಗೆ ತಾಂತ್ರಿಕ ಮಂಜೂರಾತಿ ನೀಡಿದೆ.

ತಾಂತ್ರಿಕ ಸಹಾಯಕರು ಬಿ.ಬಿ.ಎಂ.ಪಿ.
ದಾಸರಹಳ್ಳಿ ವಲಯ, ಬೆಂಗಳೂರು

Improvements to road & drain at Surya Enclave Abbigere in ward no-12

Shettyhalli Sub-Division.

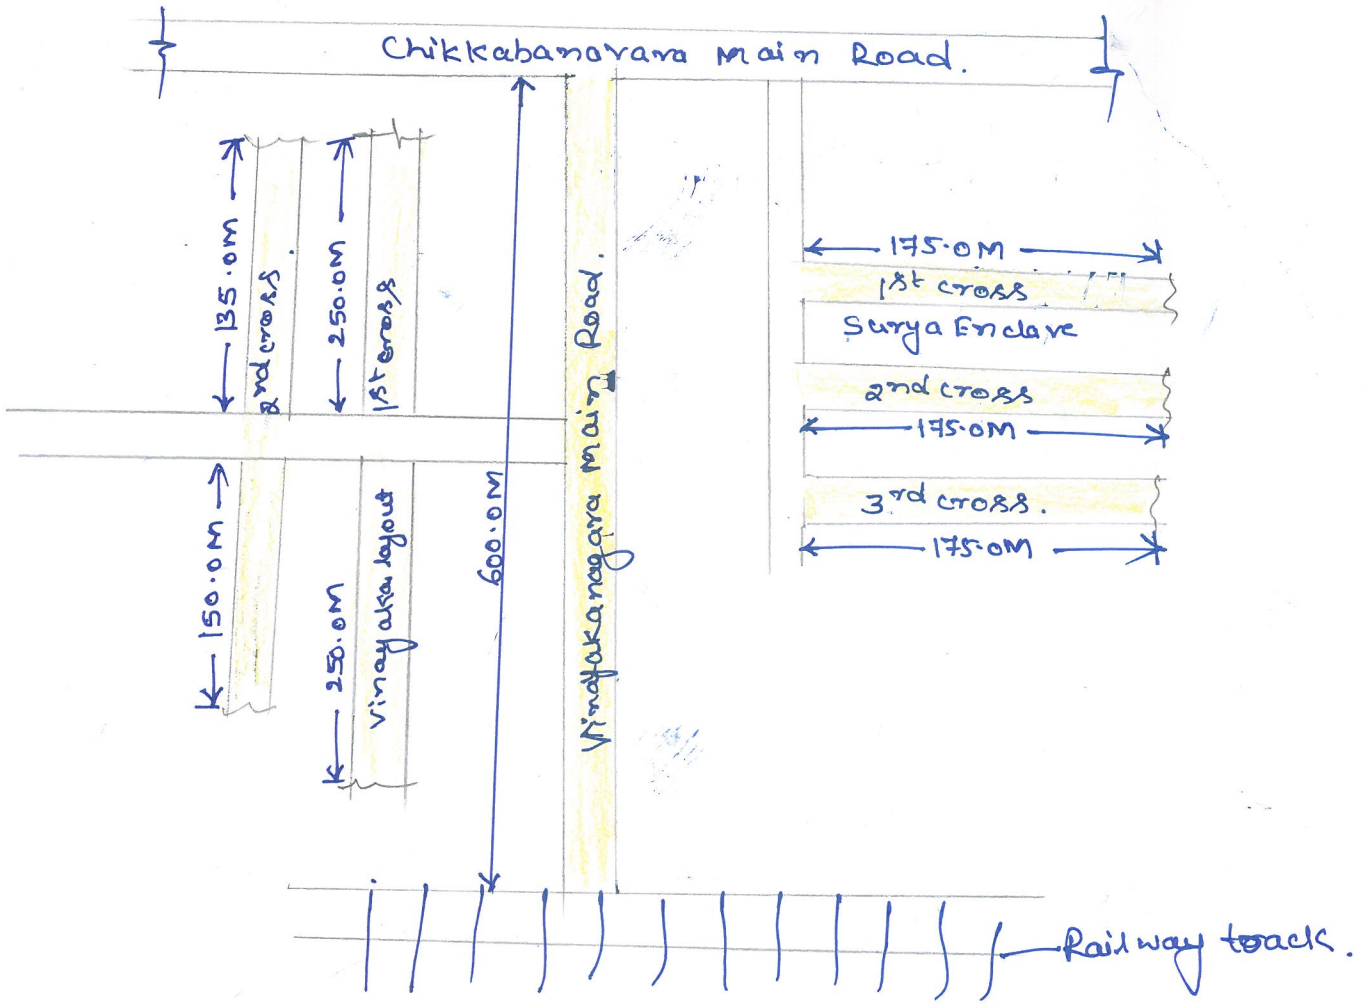

Ravi.N.K.
.. AE W-12

ಸಹಾಯಕ ಕಾರ್ಯಪಾಲಕ ಅಭಿಯಂತರರು
ಶೆಟ್ಟಿಹಳ್ಳಿ ಉಪವಿಭಾಗ, ದಾಸರಹಳ್ಳಿ ವಲಯ
ಬೃಹತ್ ಬೆಂಗಳೂರು ಮಹಾನಗರ ಪಾಲಿಕೆ
ಎಸ್.ಎಂ. ರಸ್ತೆ, ರವೀಂದ್ರನಗರ, ಬೆಂಗಳೂರು.